brother
at your side



Professional All-in-One Mono Laser Printer

Super-fast, high-quality 2-sided printing and scanning with integrated solutions

MFC-EX910

PRINT SCAN COPY FAX

www.brother.eu

Professional All-in-One Mono Laser Printer

The outstanding build quality together with the impressive 2-Sided print and scan speeds, makes the MFC-EX910 the ideal partner for high print volume businesses.

Premium solutions come out of the box, ready to be configured to meet your exacting business needs.

MFC-EX910



Key features:

- Print up to 50 pages per minute
- 2-Sided print, up to 24 sides per minute
- 2-Sided scan, up to 100 images per minute[3]
- 17.8cm Colour touchscreen
- Gigabit ethernet, optional 5GHz WiFi
- 2GB Internal memory with optional secure USB storage
- 80 Sheet 2-Sided Automatic Document Feeded (ADF), 520 sheet paper input tray expandable up to 2,600[11]
- Comes with 25,000 page ultra high yield toner[7]
- Compatible with Brother and 3rd Party solutions[19]
- Comes with Secure Print+, Barcode Print+, Remote Panel, Request Help, Order Supplies and Dedicated UI
- NFC for secure authentication
- Available under a managed print service (MPS) contract

Secure by design

To keep pace with the ever-evolving legislation on privacy and data security, our devices offer the latest industry-standard security features to securely protect your data.

All our products are secure as standard. With businesses shifting towards Zero Trust environments, we know that security is your highest priority. Our security experts continuously research new enhancements to products, solutions and services to proactively ensure all our products are ‘secure by design’.

The MFC-EX910 provides a range of robust features. It uses triple-layer security at a device, network and document level which is verified through external security certification. This offers added peace of mind and guarantees that the integrity of your data is maintained at every step.

brother at your side

The MFC-EX910 comes with a flexible suite of security features and solutions that can be tailored to your business, enabling you to easily audit, control and manage your fleet of devices securely.



Your device protects your business by reducing its attack surface through:

Restricting user access - by using LDAPS, Windows Active Directory together with NFC authentication, only authorised users are able to access the device.

Restricting privileges at a device level - with Secure Function Lock and Setting Lock, only authorised users are permitted access to specific functions.

Maintaining device integrity - with runtime intrusion detection, Secure Boot, digitally signed firmware and end-to-end encrypted connections, devices are always performing at their optimum level of security.



Your network is protected with flexible industry standard features and management tools including:

Intrusion protection - with protocol management, interface restrictions and IPV4 filtering, you have the flexibility to adapt device settings to your business.

Secure connection - securely connect to enterprise level wired and wireless networks through industry standard IEEE 802.1X.

Secure encrypted communication - by using flexible industry standards such as TLS, SSH, IPSEC, HTTPS and SNMP3, your business can tailor the device to its network.

Easily manage and configure your security profile - using Device Master Settings, BRAdmin Pro 4 and Mass Deployment Tool, your business can apply settings to entire fleets of devices.

Audit your devices - using SIEM integration through Syslog, you can gather real time usage information on your devices.

brother at your side

Your documents are protected through encryption, storage protection and secure print solutions including:

Encrypted document transfer - when you send your print data from your computer to the device, IPPS/HTTPS encryption ensures your data is secure and unreadable.

Secure scan data transfer - whether you are scanning to your local network or over the internet via Web Connect or a cloud-based service, your data is protected using TLS, HTTPS, SFTP (SSH).

Non-persistent internal memory - all print job data is automatically wiped during a reboot and data is purged, ensuring no information is left on the device.

Secure print release - using a Brother secure print solution, documents are only released when you are ready to print and collect them.

3rd party integration - through Brother Solutions Interface (BSI), our devices can be fully integrated with trusted 3rd party partners such as Kofax and YSoft, which adds an extra layer of security to your business.



brother at your side

Solutions ready

Automate workflows and improve business processes and security with print management solutions.

We offer a suite of document management, security and workflow solutions which can be added to the MFC-EX910 to provide additional professional features to further improve your business processes.

Intelligence built-in

Personalised touchscreen - improve efficiency by making your frequently used functions more accessible, by customising the home screen.


Secure print release - Secure Print+ enables you to print your confidential business documents securely. Your sensitive documents are only printed when you are ready to collect them from the printer, ensuring only authorised staff have access to them.

Barcode printing - with Barcode Print+, simply supply your printer with the information for the barcode, which is then printed exactly as it should appear. The printed 2D and 3D barcode is easily read by a variety of barcode readers and scanners.

Order supplies - Effortlessly order your toner cartridge supplies directly from your printing device. In one touch, your selected supplier will be notified when you require replacement supplies and arrange delivery, ensuring you never run out of toner when you need it.

Remote Panel - Remote support in real-time, your IT provider can access the full functionality of your printer, to quickly diagnose and resolve any issues and enable settings to be changed as if they were physically standing at the printer.

Request Help - Automatic diagnostics for your IT administrator or service provider to easily troubleshoot errors that may occur. You simply press the 'Request Help' icon on the control panel and a full diagnostic report is created and automatically emailed to your IT administrator.

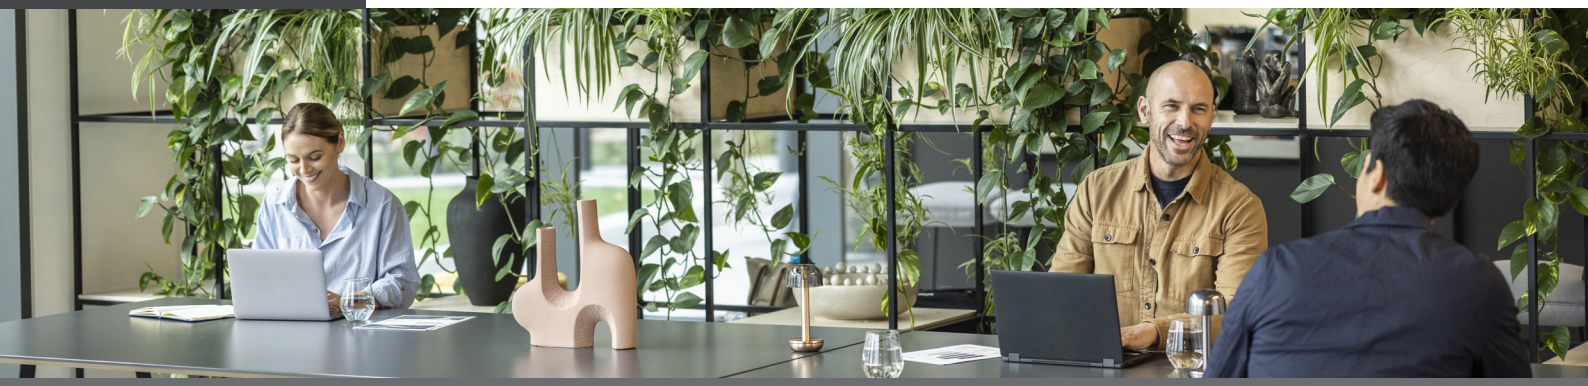

Seamless integration

Whether you already use print software or would like to understand how specialist print software can help your business, we are here to help.

As a Brother customer, you will have access to a wide choice of leading software vendors including Kofax, YSoft and many more.

We work closely with our software partners across print management and document capture to create tailored solutions for your specific requirements. When we partner with a software vendor, we ensure your MFC-EX910 works even harder to meet your needs.

General

Technology
Electrophotographic Laser

Memory
2GB

Control panel
17.8cm Colour
Touchscreen LCD

Local Interface
Hi-Speed USB 2.0, USB 2.0 Host (Front | Rear)

Wired Network
Gigabit Ethernet

Wireless Network
2.4GHz and 5GHz Support (optional)

Carton Contents
Device, Inbox Toners, Drum, Power Supply Cord, Quick Set-Up Guide, Warranty Card

Print

Print Speed (A4)
1-Sided: 50ppm Mono
2-Sided: 24 sides per minute Mono

FPOT (First Print Out Time)
Up to 6.7 Seconds Mono

Quiet Mode
A mode to reduce the printing noise

Resolution
Up to 1200 x 1200dpi

Print Languages
PCL6, BR-Script3, IBM Proprinter XL, Epson FX-850, PDF Version 1.7, XPS Version 1.0

Embedded Fonts (PCL)
73 scalable fonts,
12 bitmap fonts

Embedded Barcodes (PCL)
16 bar codes*
*Code39, Interleaved 2 of 5, FIM (US-PostNet), Post Net (US-PostNet) EAN-8, EAN-13, UPC-A, UPC-E, Codabar, ISBN (EAN), ISBN (UPC-E), Code128 (set A, set B, set C), EAN128 (set A, set B, set C), Code93, GS1Databar, MSI

Embedded Fonts (Postscript)
66 scalable fonts

Printer Functions

N-up Printing
Reduce up to 25 pages into a single page

Poster Printing
Enlarge a single page into a poster using 2x2, 3x3, 4x4 or 5x5 pages

Toner Save Mode
Use the Toner Save Mode to reduce toner consumption without affecting print speed

Watermark Printing
Watermark your documents with predefined text, custom logo or custom messages

ID Printing
Add identification to your printed documents (date and time, short custom message or PC username)

Booklet Printing
Print documents in A5 booklet format using automatic or manual 2-sided print

Print Profiles
Store your favourite driver settings as profiles to easily recall them

Direct Print
Print directly from a USB flash memory drive. Supported formats include; PDF 1.7, JPEG, Exif+JPEG, PRN (created using printer driver of model), TIFF (scanned using brother model), XPS version 1.0

Manual 2-Sided Print
Manual 2-sided printing (recommended for media not supported by automatic 2-sided print)

Storage Print
Easily retrieve and print your documents which are AES 256 encrypted and held within an attached USB flash memory drive storage (not included)

Reverse Print
Rotate the content of a printed document by 180°

Carbon Copy
Prints additional copies of the same document to paper taken from additional paper trays

Print Complete Notice
A printing notification can be set to go to your computer

Match Media
Assign an ID to a specific tray to make the selection of different media types from a specific tray easier

Skip Tray
Configures your paper tray selection to avoid specific trays/ media for regular printing

Job Separation
Insert a different coloured piece of paper between different print jobs to separate them for easy identification

Secure Print
Protect print jobs with a 4 digit release code required at the device in order for them to be printed

Printer Driver

Windows
Windows 11
(32 and 64 bit editions)
and more

macOS
Printing via macOS requires the use of AirPrint. Mac drivers are not provided.

Linux
CUPS, LPD/LPRng
(i686 and x86_64)

ChromeOS
Supports native ChromeOS printing

PCL Driver
Generic PCL XL driver

PostScript Universal Printer Driver
Driver for Windows that enables you to print to any network or locally connected Brother printer

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

Paper Handling[11]

Paper Input
Standard Tray
520 Sheets
(with paper low detection)

Multi Purpose Tray
100 Sheets

Automatic Document Feeder (ADF)
80 Sheets

Paper Output
250 Sheets A4
(with stack full sensor)

Envelope Printing
Yes from multi purpose tray

Media Sizes
Standard Tray
A4, Letter, B5(JIS), A5, A5(Long Edge), A6, Executive, Legal, Mexico Legal, India Legal, A4 short (270mm), Folio,16K

Multi Purpose Tray
Width 69.8 to 215.9 mm,
Length 127 to 355.6 mm
Envelope: COM-10, DL, C5, Monarch

ADF
Width: 105 to 215.9 mm,
Length: 147.3 to 355.6 mm

Scanner Glass
Up to A4 /Legal

Auto 2-Sided
A4

Media Type and Weights
Standard Tray
Plain Paper, Letterhead, Colored Paper, Thin Paper, Recycled Paper, Thick Paper
60-163gsm

Multi Purpose Tray
Plain Paper, Letterhead, Colored Paper, Thin Paper, Thick Paper, Thicker Paper, Recycled Paper, Bond, Label, Envelope, Env. Thin, Env.Thick
60-230gsm

ADF
Plain and Recycled paper
64-90gsm

Auto 2-Sided
Plain Paper, Letterhead, Colored Paper, Thin Paper, Recycled Paper
64-105gsm

Mobile and Web Connectivity

Brother Mobile Connect[17] (Android)
Print from, scan to, preview copies and check the machine status from an Android device

Brother Mobile Connect[17] (iPad / iPhone)
Print from, scan to, preview copies and check the machine status from an iPad / iPhone

Apple AirPrint[17]
Print from and scan to most common file types from any AirPrint enabled application

Brother Print Service Plugin[17]
Print from an Android devices without a dedicated App.

Mopria™ [17]
Print most common file types from Mopria™ supported Android devices

Brother Apps[18]
Scan to Mobile, Scan to Searchable PDF, Fax forward to Cloud/E-mail, Scan to PowerPoint, Scan to Excel, Scan to Word, Easy scan to E-mail

Web Connect[18]
Print from and scan to without using a PC on Box, Dropbox, Evernote, OneDrive, Google Drive™ OneNote

Copy

Copy Speed (A4)
1-Sided: 50ppm Mono
2-Sided: Yes

Resolution
Up to 1200 x 600dpi

FCOT
(First Copy Out Time)
Up to 8.7 Seconds Mono

Grey Scale
256 shades of grey
(8 bit for each colour)

Copy Functions

Multi-Copying/Stack/Sort
Makes up to 999 copies of each page / Stacks or Sorts

Enlargement/Reduction Ratio
Reduce or Increase document sizes from 25% to 400% in 1% increments

2 in 1 ID Copying
Allows the user to copy both sides of an ID card to a single A4 sheet

Copy Interrupt
Configure the machine to interrupt a print job in progress at any time to print another copy function job

Receipt Copying
Produces clearer copies of receipts

N in 1 Copying
Allows the user to compress 2 or 4 pages on to a single A4 sheet

Scan

Scanner Type
Dual CIS (Contact Image Sensor)

Colour and Mono Scanning
Yes

Scan Speed (A4)[3]
1-Sided: 50ipm Mono and 30ipm Colour
2-Sided: 100ipm Mono and 60ipm Colour

Scan Resolution from ADF
600 x 600dpi

Scan Resolution from Scanner Glass
1200 x 1200dpi

Interpolated Scan Resolution
Brother Scanner Utility enhances up to 19,200 x 19,200 dpi

Colour Depth
48 bit colour Processing (Input)
24 bit colour Processing (Output)

Grey Scale
16 bit colour Processing (Input)
8 bit colour Processing (Output)

Scanner Functions

Supported File Formats
Including PDF (PDF/A-1b, Secure PDF, Signed PDF, Searchable[17]) JPEG,TIFF, XPS

Standard Functions[17]
Scan to USB, E-mail, OCR, Image and File

Network Scanning
Scan to network folder (SMB)[16], FTP, SFTP, Email Server, SharePoint (On Premise)

Direct Scan
Scan directly to a USB flash memory storage

Scan Features
Auto Deskew from ADF, Rotate Image[16], Background Processing[16], Colour Drop[16], Character Correction[16,17], Edge Emphasis[16], Reduce Noise[16], Edge Fill[16,17], Skip Blank Page, Split and Multi page PDF

Scan To Microsoft Office
Scan to Word (.docx), PowerPoint (.pptx), Excel (.xlsx) for Microsoft Office

Scan Profile[15]
Create up to 25 preset network, SFTP/FTP profiles for an easy way to store multiple scan settings

Document Separation
Create scanned files based on blank sheet separation or a specific number of single sided images or sheets of paper, even if more documents are set on the ADF

Scanner Drivers

Windows
TWAIN and WIA
Windows 10
(32 and 64 bit editions)

macOS
Scanning via macOS requires the use of AirPrint. Mac drivers are not provided.

Linux
SANE (32 and 64 bit editions)

ChromeOS
Supports native ChromeOS scanning

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

Fax

Automatic 2-Sided Faxing
Yes

Fax Modem
33,600bps (Super G3)

Grey Scale
256 shades (8 bit) of grey are available for faxing

Out of Paper Reception
Up to 500 pages (ITU-T Test Chart, Standard Resolution, JBIG)

Broadcasting
Send the same fax message up to 350 locations

Memory Transmission
Up to 500 pages
(ITU-T Test Chart, Standard Resolution, JBIG)

Fax Functions

Internet Fax (I-Fax)
Fax documents over the internet as an email attachment

Fax to Server
Scan a document and send it over the network to a separate fax server

Automatic Redial
Automatic redialling if the recipient fax is busy

Telephone Index
An electronic, alphabetical listing of stored speed dials and group numbers

Chain Dialling
Allows the user to store parts for long dialing sequences in different speed dial locations

Batch Transmission
Stores documents for the same location in the machines memory for transmission in a single call

Fax Forwarding
Sends a fax received in memory to another pre-programmed fax number

Remote Retrieval
Allows users to remotely access their machine and retrieve stored fax messages

Fax Stamp
Add the date and time to all received faxes

Cover Page
Create custom cover pages for outgoing faxes

Station ID
An ID and fax number will be printed as the header of every fax sent

PC-Fax Send[15,18] and Receive[16,18]
Send and Receive faxes directly from your PC. Supports mono only

Distinctive Ring Detection
An external service that allows two or more telephone numbers shared on a single fixed line and use different ring tones (UK and Denmark only)

Error Correction Mode (ECM)
Detect line errors during fax transmission and resend the page(s) of the document that had an error (recipient machines must share this feature for it to work)

Auto Reduction
When receiving a single page document longer than A4 (297mm) the fax machine will automatically reduce the message to fit onto a single A4 sheet

Fleet Management Tools

Unattended Installer[16]
Ability to centrally deploy and customise our drivers and software

MSI Installer[16]
Modular installers that can be distributed through On-premise Active Directory

BRAdmin[16,17]
LAN/WAN management software

Embedded Web Server
Web based print management software embedded onto the device

Driver Deployment Wizard[16,17]
Easily create print drivers for hassle free deployment over your network

Mass Deployment Tool[16]
Provides a configuration interface to help manage and deploy device settings

Status Monitor[16]
Monitor the status of your machine from your computer

Software

Brother iPrint&Scan Desktop[15,17]
Print from, scan to, preview copies and check the machine status from Windows or macOS PC

PaperPort SE 14[16,17]
Document management and sharing program from KOFAX

Utilities
Provides setup guides, manual, FAQ, troubleshooting and contact to Brother customer service

Easy Setup
Simple access to drivers and software for the installation of your Brother machine from support.brother.com

Connectivity

Wired Network
Gigabit Ethernet (10Base-T/100Base-TX/1000Base-T)

Wireless Network[22]
2.4GHz: IEEE 802.11 b/g/n (Infrastructure Mode)
IEEE 802.11 g/n (Wi-Fi Direct)

5GHz: IEEE 802.11 a/n (Infrastructure Mode)
IEEE 802.11 a/n (Wi-Fi Direct)

Wi-Fi Direct®[22]
Print wirelessly without having to go through a wireless access point (both automatic and manual methods supported)

Wireless Setup Support[22]
Wi-Fi Protected Setup (WPS)

Wireless Applications[22]
Vertical Pairing

Mobile
Print or scan from your mobile device with Brother Mobile Connect, Airprint, Mopria

Local Interface
Hi-Speed USB 2.0, USB 2.0 Host (Front | Rear)

Security Features

Wired Network Security
APOP, SMTP-AUTH, SSL/TLS (IPPS, HTTPS, FTPS, SMTP, POP3, IMAP4), SNMP v3 802.1x (EAP-MD5, EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), Kerberos, IPsec

Wireless Network Security
WEP 64/128 bit, WPA-PSK (TKIP/AES), WPA2-PSK (TKIP/AES), WPA3-SAE (AES)
*Wi-Fi Direct supports WPA2-PSK (AES) only.
APOP, SMTP-AUTH, SSL/TLS (IPPS, HTTPS, FTPS, SMTP, POP3, IMAP4), SNMP v3, 802.1x (EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), Kerberos, IPsec

IPv4
ARP, RARP, BOOTP, DHCP, APIPA(Auto IP), WINS/NetBIOS name resolution, DNS Resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, POP3, SMTP Client, IPP/IPPS, FTP Client and Server, CIFS Client, TELNET Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMP, Web Services (Print/Scan), SNTP Client, LDAP, IMAP4, Syslog

IPv6
NDP, RA, DNS resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, IPP/IPPS, POP3, SMTP Client, FTP Client and Server, CIFS Client, TELNET Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMPv6, SNTP Client, LDAP, Web Services (Print/Scan), IMAP4, Syslog

IP Filter
Restrict which network users can or cannot access the device over the network (IPv4 only)

Secure Print
Protect print jobs with a 4 digit release code required at the device in order for them to be printed

E-mail Notifications
Automatically have the device send e-mail alerts when it requires attention, such as when the toner is low or needs replacing

E-mail Reports
Receive usage reports on a regular basis via e-mail

Automatic Intrusion Detection
All Brother Print devices are secure by design. Devices automatically recognise security attacks and take preventative measures, including rebooting where necessary, to ensure the device remains secure

Firmware Updates
In addition to allowing automatic update alerts to install the latest version the printer can be set to not receive older firmware versions to avoid downgrade by an unauthorised user

Cloud Secure Print
Enables password protected driverless print job release

Setting Lock
Secures access to the devices control panel by locking it

Certificate Management
Use the default standard self-signed, create a custom self-signed certificate, certificate signing request (CSR), or external public cerificate & private key for protected network communcation

Secure Function Lock 3.0
Use a 4 digit pin or a password to identify and authenticate an individual or groups of users over a network. Allows access control for up to 200 users

Digitally-signed Firmware
The firmware for Brother print and scan devices is digitally signed and secure

Syslog
Allows IT Admin to access a single application (SIEM tool) to get device status updates for audit purposes over Syslog

On-Premise Active Directory/LDAP Authentication
Utilise existing infrastructure to restrict access to Brother devices using AD/LDAP. Staff can easily use their existing network login credentials to authenticate

Port-based Network Access Control
(IEEE 802.1x)
Brother devices are in full compliance with this standard, to allow connection to an 802.1x EAP (Extensible Authentication Protocol) protected network

Restrict network protocols
The Protocol Control feature allows an administrator to restrict communication protocols (e.g. FTP, Telnet) as required

Store Print Log
Allows audit of a print log file saved to CIFS server. Record ID, type, name, user, date, time, page count for every print job

Near-Field Communications (NFC) / Card Reader Support

Integrated NFC Reader
Supported NFC standards include: (ISO14443 Type A) MIFARE Standard/Plus/ Ultralight/Ultralight C/DESfire my-d move, Tag-it (ISO15693 Type B)

External NFC Card Reader Support

RFIDeas pcProx Enroll
- RDR-6081AKU
- RDR-6281AKU
- RDR-6381AKU
- RDR-6E81AKU
- RDR-6H81AKU

RFIDeas AIR ID Enroll
- RDR-7081AKU
- RDR-7581AKU
- RDR-7F81AKU

Elatec
- TWN3 MIFARE
- TWN3 MIFARE NFC
- TWN3 Multi ISO
- TWN4 MIFARE NFC

(3rd party card readers require additional purchase. Other card readers supported if registered via the embedded web server)

Supplies and Consumables

Inbox Toner[7]
1 x 25,000 pages (BK)

Standard Yield Toner[7]
TN3600 - 3,000 pages

High Yield Toner[7]
TN3600XL - 6,000 pages

Super High Yield Toner[7]
TN3600XXL - 11,000 pages

Ultra High Yield Toner[7]
TN3610 - 18,000 pages

Super Ultra High Yield Toner[7]
TN3610XL - 25,000 pages

Drum Unit
DR3600 Approx 75,000 pages at 3 pages per job

Optional Accessories

Card Reader Holder
CH-1000
Optional external NFC Card reader holder

Filter Holder
FH-1100
Used in Quiet Mode (Germany Only)

Paper Trays
250 sheet tray LT-5505
520 sheet tray LT-6505
4 x 520 sheet tower tray TT-4000

Maximum combinations
2 x LT-5505
or 2 x LT-6505
or 1 x LT-5505 + 1 x LT-6505
or TT-4000

Wi-Fi Module
NC-9110W
Optional wireless network interface

Address Book

LDAP
The ability to connect to an external LDAP enabled address book, like Microsoft Exchange. Compatible with LDAP and LDAPS

Speed Dials
300 locations for E-mail addresses and fax numbers

Group Dial
A combination of up to 20 groups can be stored for broadcasting

Solutions and Upgrades[19]

Compatible with
Order Supplies, Remote Panel, Request Help, ThinPrint Client, SecurePrint+ Barcode Print+, Email Print, Barcode Utility, Custom UI, Dedicated UI

Comes with
SecurePrint+, Barcode Print+, Order Supplies, Remote Panel, Request Help and Dedicated UI

3rd Party Compatibility

Brother Solutions Interface (BSI)
Create powerful cloud and on premise solutions directly integrating the advanced print, scan and security capabilities of Brother devices.
For more information visit: www.brother.eu/developers

3rd Party Solutions
Compatible through Brother Solutions Interface (BSI) including Kofax ControlSuite, YSoft and more

Dimensions and Weights

With Carton (WxDxH)
588 x 580 x 628mm - 24.20kg

Without Carton (WxDxH)
495 x 495 x 518mm - 18.10kg

Duty Cycle

Recommended Monthly
Up to 16,000 pages

Operating Requirement

Power Requirement
220-240V
AC 50/60Hz

Operating Environment
Humidity 20 - 80 %
10°C - 32.5°C
50°F - 90.5°F

Storage Environment
Humidity 35 - 85 %
0°C - 40°C
32°F - 104°F

Environment

Approx Power Consumption[13,23]
Copying: 710W
Copying in quiet mode: 430W
Printing: 710W
Printing in quiet mode: 430W
Ready: 31W
Sleep: 6.7W
Power Off: 0.05W

TEC Value
0.63 kWh/week

Sound Power[12]
Printing: 7.06B(A)
Ready: 4.90B(A)
Quiet Mode: 6.54B(A)
Deep Sleep: Inaudible

Sound Pressure[12]
PC Printing (Mono):
Approx. 54.0dB(A)
Ready: 35.0db(A)
Quiet Mode: 50.0db(A)

Toner Save
This reduces the toner consumption to get more pages from your consumables

Blue Angel
Yes

GS Mark
Yes

Nordic Swan
Yes

3 Scan Speeds based on ISO/IEC 17991
7 Approx. declared yield value in accordance with ISO/IEC 19752
11 Capacity calculated with 80gsm paper
12 Sound pressure and sound power level in accordance with ISO 7779
13 Power consumption power off is measured according to IEC 62301 Edition 2.0
15 Windows and macOS only
16 Windows only
17 Optional download
18 Requires an Internet connection
19 Requires additional activation
22 Optional wireless module required
23 Power consumption is measured using ENERGY STAR Ver 3.1 test method network configuration

Brother Earth

Working with you for a better environment

At Brother, our green initiative is simple. We strive to take responsibility, act respectfully and try to make a positive difference to help build a society where sustainable development can be achieved. We call this approach Brother Earth.

www.brotherearth.com

All specifications correct at the time of printing and are subject to change. Brother is a registered trademark of Brother Industries Ltd. Brand product names are registered trademarks or trademarks of their respective companies.

brother at your side